




SAPOR SHIPBUILDING INDUSTRIES SDN BHD (624211-W)

Address: No 19-21, 1st Floor, Jalan Chengal, P.O.Box 1676, 96008 Sibu, Sarawak, Malaysia.
Tel: (+6) 084-324 513 Fax: (+6) 084-324 400

65T Harbour Tug

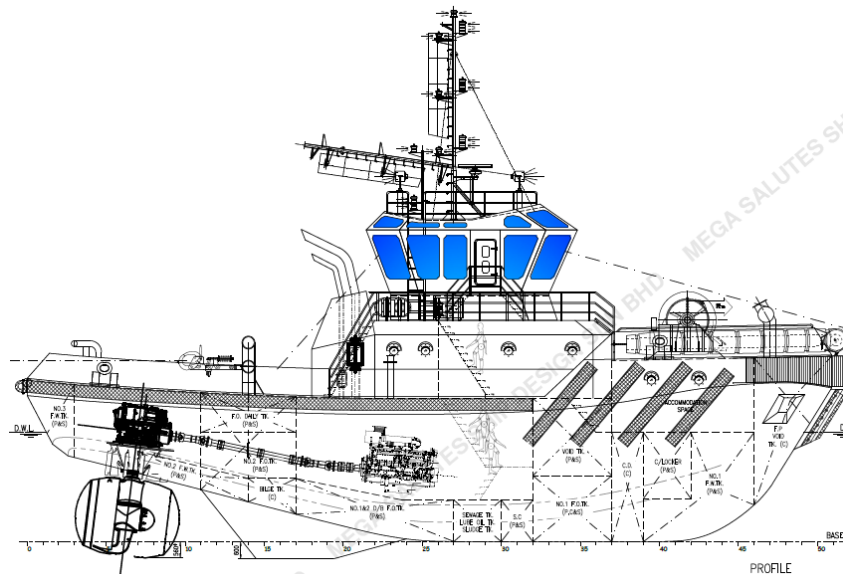

Principal Particulars

Hull No	: 181 & 182
L.O.L	: 28m
Moulded Breath	: 11.50m
Moulded Depth	: 5.0m
Designed Draft	: 3.80m
Accommodation	: 10 MEN
Class	: NK

Machinery & Propulsion

Main Engine	: 2 x Cummins QSK 60 2700 BHP 1800 RPM
Azimuth	: 2 x SZP200-FP
Propeller	: 2 x FPP 2350mm
Main Genset	: 2x Cummins 150kW
Bollard Pull	: 65T
Fire Fighting	: FiFi 1 PTO

Cargo Capacity

Fuel Oil	: 130m3
Fresh Water	: 75m3
Bilge & Ballast Pump	: 30m3/hr @ 30m
FS & Fire Pump	: 30m3/hr @ 30m
FO Transfer Pump	: 5m3/hr @ 33m

Navigation & Equipments

A1	: A1
Radar	: Furuno 36nm
EPIRB	: NEB-2000
SART	: NRT-1000
Echo Sounder	: F2000
AIS	: 50N Class B
GPS	: Furuno GP-39
Speedlog	: LLHH-DS199
VHF	: VHF9000A
BNWAS	: JHD01

Deck Equipment

Anchor & Chain	: 2 x 660kg & 24mm
Anchor Windlass	: 30T, 170T brake
cum Towing Winch	holding
Towing Rope	: 96mm @ 220m
Towing Hook	: 90T